


TBL Series(3)




BOLT/Low-volt 3-Phase

- 30 - 60 Amp 250V
- Excellent Filtering for Normal Mode and common Mode Noise
- Low Leakage
- Bolt Terminals
- Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.
- Approved by EN60939-2 

SPECIFICATIONS

Item	UF30TBL	UF40TBL	UF50TBL	UF60TBL	Unit
RATED CURRENT	30	40	50	60	A
RATED VOLTAGE	250 Max				V
TEST VOLTAGE	1,500Vrms between line and earth for 1 minute				/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth				/
LEAKAGE CURRENT	1 Max				mA
TEMPERATURE RISE	40 Max				℃
OPERATING TEMPERATURE	-25 ~ +85				℃
APPROVALS	TUV	TUV	TUV	TUV	/

BLOCK DIAGRAM

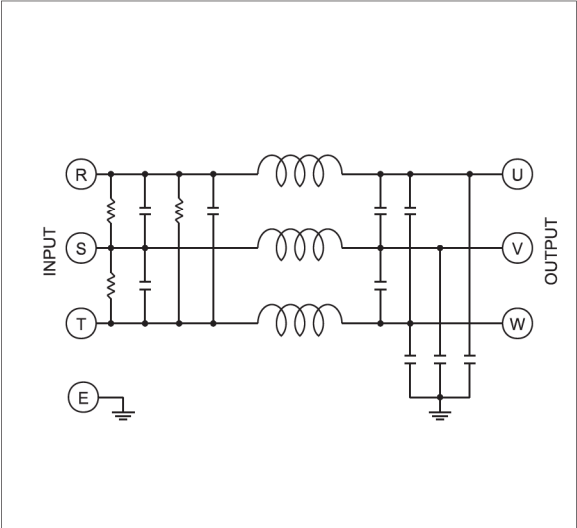

DIMENSIONS(UNITS : MM)

