

TBL Series(7)




BOLT/Low-volt 3-Phase

- 450Amp 250V
- Excellent Filtering for Normal Mode and common Mode Noise
- Low Leakage
- Bolt Terminals
- Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.

SPECIFICATIONS

Item	UF450TBL	Unit
RATED CURRENT	450	A
RATED VOLTAGE	250 Max	V
TEST VOLTAGE	1,500Vrms between line and earth for 1 minute	/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth	/
LEAKAGE CURRENT	1 Max	mA
TEMPERATURE RISE	40 Max	℃
OPERATING TEMPERATURE	-25 ~ +85	℃
APPROVALS		/

BLOCK DIAGRAM

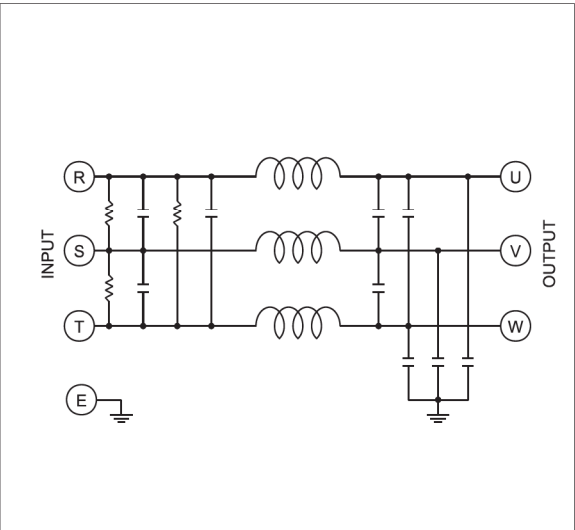

DIMENSIONS(UNITS : MM)

