


TBH Series(2)




BOLT/High-volt 3-Phase

- 20 - 40Amp 450V
- Excellent Filtering for Normal Mode and common Mode Noise
- Low Leakage
- Bolt Terminals
- Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.
- Approved by EN60939-2 

SPECIFICATIONS

Item	UF20TBH	UF30TBH	UF40TBH	Unit
RATED CURRENT	20	30	40	A
RATED VOLTAGE	450 Max			V
TEST VOLTAGE	1,500Vrms between line and earth for 1 minute			/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth			/
LEAKAGE CURRENT	1 Max			mA
TEMPERATURE RISE	40 Max			℃
OPERATING TEMPERATURE	-25 ~ +85			℃
APPROVALS	TUV	TUV	TUV	/

BLOCK DIAGRAM

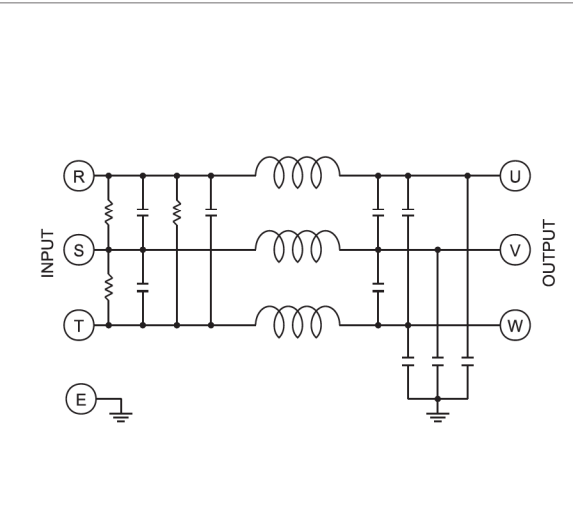

DIMENSIONS(UNITS : MM)

