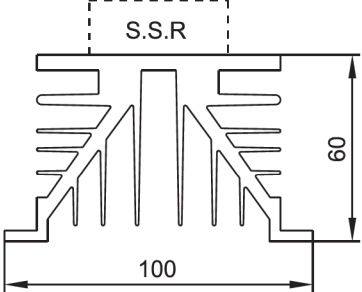
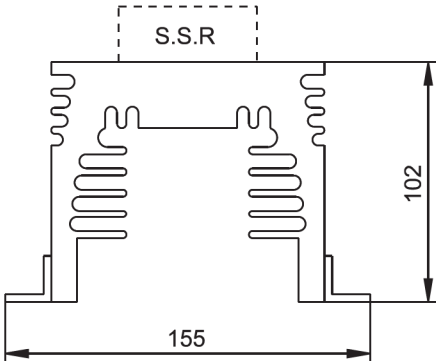


10. STANDARD HEATSINK


1) UHS118 Series

 <p>unit : mm</p>	MODEL	Length(mm)
	UHS118-1-45	45
	UHS118-1-60	60
	UHS118-1-80	80
	UHS118-3-120	120
	UHS118-3-150	150


2)UHS11 Series

 <p>unit : mm</p>	MODEL	Length(mm)
	UHS11-1-80	80
	UHS11-1-105	105
	UHS11-3-80	80
	UHS11-3-105	105
	UHS11-3-150	150

3) UHS120V80-3-110

 <p>unit : mm</p>	Length=110
--	------------

4) UHS124V128-3-105

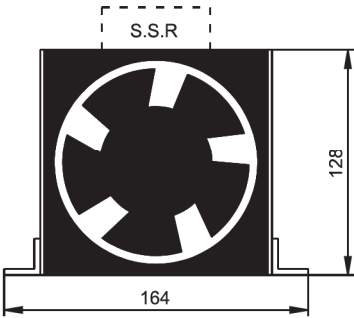 <p>unit : mm</p>	Length=105
---	------------

11. 방열판 선정 가이드

S.S.R 모델별로 차이는 있으나 주위온도 상온에서 부하 전류가 S.S.R 출력 전류 정격의 60% 이하 조건하에 선정된 방열판으로 주위온도가 높거나 부하전류가 큰 경우에는 S.S.R 또는 방열판을 변경하여 적용해야 한다.

S.S.R 정격구분	S.S.R모델명	HEATSINK
2A	PDA1-202Z/202R	NON
3A	PDA1-203Z/203R, PDD0-103N	NON
5A	PDA1-205Z/205R, PDD0-105N	NON
8A	PDA1-208Z/208R	NON
	PDA1-208ZHL/208ZHS PDD0-108NHS/208NHS/608NHS	UHS118-1-45
10A	SDD0-110N/210N/610N	UHS118-1-45
15A	PDA1-215ZHL/215ZHS PDD0-115NHS/215NHS/615NHS SDA1-215Z/215R/415Z/415R SAA1-215Z/415Z	UHS118-1-45
	SDA2-215Z/415Z SAA2-215Z/415Z	UHS118-3-120
	SDA3-215Z/415Z SAA3-215Z/415Z	UHS118-3-120
20A	PDD0-220NHS/620NHS SDD0-120N/220N/620N	UHS118-1-60
25A	PDA1-225ZHL/225ZHS SDA1-225Z/225R/425Z/425R SAA1-225Z/425Z	UHS118-1-60
	SDA2-225Z/425Z SAA2-225Z/425Z	UHS118-3-120
	SDA3-225Z/425Z SAA3-225Z/425Z	UHS118-3-150
30A	SDD0-130N/230N/630N	UHS118-1-80

S.S.R 정격구분	S.S.R모델명	HEATSINK
40A	SDD0-140N/240N/640N	UHS118-1-80
	SDA1-240Z/240R/440Z/440R	
	SAA1-240Z/440Z	
	SDA2-240Z/440Z	UHS118-3-150
	SAA2-240Z/440Z	
	SDA3-240Z/440Z	UHS11-3-105 or UHS120V80-3-110 with FAN
	SAA3-240Z/440Z	
50A	SDA1-250Z/250R/450Z/450R	UHS118-1-80
	SAA1-250Z/450Z	
	SDA2-250Z/450Z	UHS11-3-80
	SAA2-250Z/450Z	
	SDA3-250Z/450Z	UHS11-3-150 or UHS124V128-3-105
	SAA3-250Z/450Z	
60A	SDA1-260R/460R	UHS11-1-80
	SAA1-260R/460R	
	SDA2-260R/460R	UHS11-3-105
	SAA2-260R/460R	
	SDA3-260R/460R	UHS124V128-3-105 with FAN
	SAA3-260R/460R	
80A	SDA1-280R/480R	UHS11-1-105
	SAA1-280R/480R	
	SDA2-280R/480R	UHS124V128-3-105
	SAA2-280R/480R	
	SDA3-280R/480R	UHS124V128-3-105 with FAN
	SAA3-280R/480R	